

**Tonneau Cover Fitting Instruction**

**Isuzu D-max Dual Cab**

**Without Sport Bar and Headboard**

**2003 – June 2012**




**Part No. ATC01289**

<b>Package includes</b>	
1 x Tonneau Cover	1 x Rope Track (1460mm Long)
2 x Bar Bracket	2 x Side Extrusion (1350mm)
26 x 4 mm Rivet	1 x Tailgate Extrusion (1380mm)
M8 Washer	1 x Fitting instructions
	1 x Support Bar
	1 x Metal Bracket

## Installation Procedure


### 1. Ropetrack

- (a) Sit the flat side of the rope track on the top front edge of the tub with the 'C' channel facing forward.
- (b) Align the front of the 'C' channel with the outside edge of the top edge. Arrow indicates to the cab (front tub).
- (c) Centralise the rope track.
- (d) With a 4mm drill bit, Drill 5 x 4mm holes evenly spaced in the rope track and into the top edge of the tub.
- (e) Place a 4mm rivet in each hole as it is drilled, but do not rivet.
- (f) Once all holes have been drilled, remove the rivets and rope track and clean any swarf away.
- (g) Apply a bead of silicone to the flat face of the rope track (the edge that comes in contact with the top edge of the tub) and place the rope track back in position.
- (h) Rivet into place.

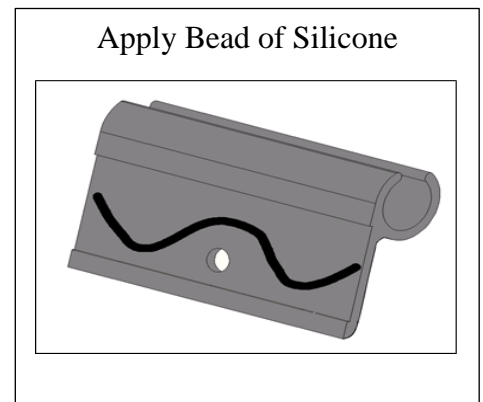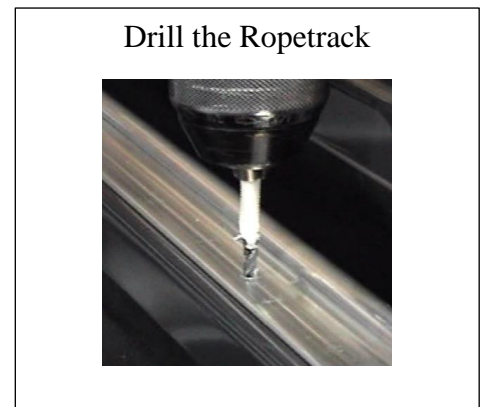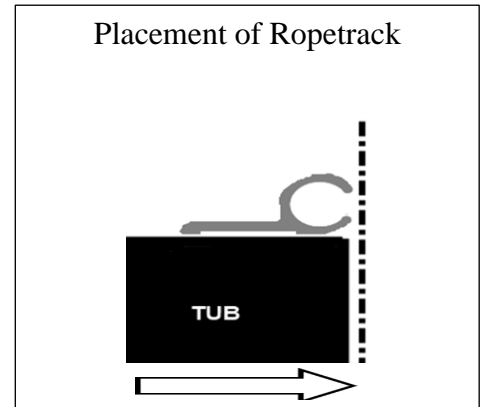


### 2. Attach Side Aluminium Rail

- (a) Locate the Side Rail (1350mm) hard up against the front edge of the tub with the notch to the rear with the aluminium square and flush with the top of the tub.
- (b) From the front edge of the rail, measure and mark the following locations:
  - 50mm, 350mm, 595mm, 627.5mm, 920mm and 1170mm.

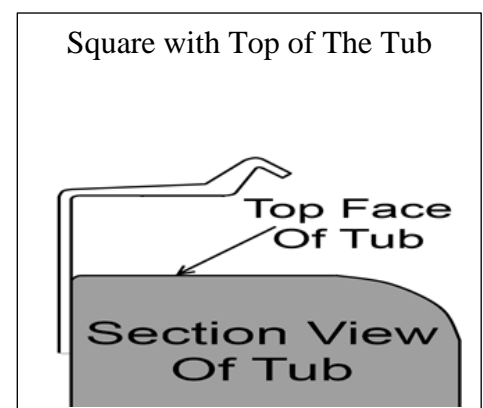


- (c) Drill through those locations into tub, using 4.5 drill bit. Then rivet into 50mm, 350mm, 920mm and 1170mm.

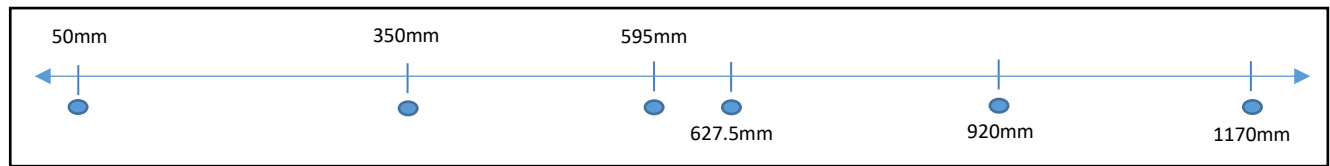

### 3. Attach Bar Bracket



- (a) Attach the bar bracket by placing a 4mm rivet through each hole of the bracket and into the centre holes in the rail.
- (b) Rivet remaining holes (660mm and 692.5mm).

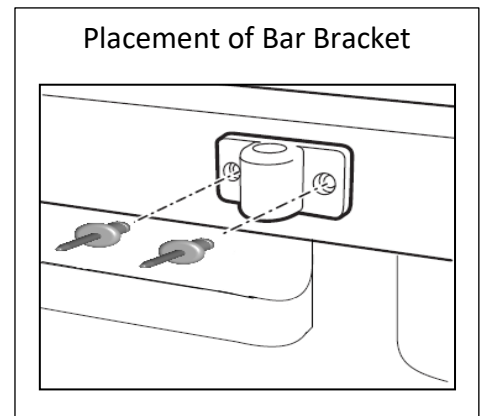

❖ Repeat Those Instruction For The Other Side.


### 4. Attach Tailgate Aluminium Rail

- (a) Measure and mark the centre, and 325mm and 650mm from the centre of the rail, 30mm from the bottom edge.
- (b) Position the aluminium in the centre of the tailgate, so that it is sitting square with the top surface of the tailgate.
- (c) Drill through each of the holes in the aluminium rail into the tailgate. Rivet the tailgate rail to the tailgate to complete the attachment.

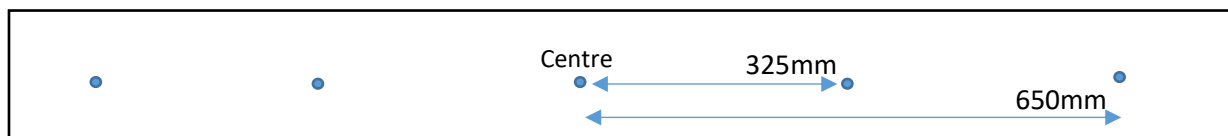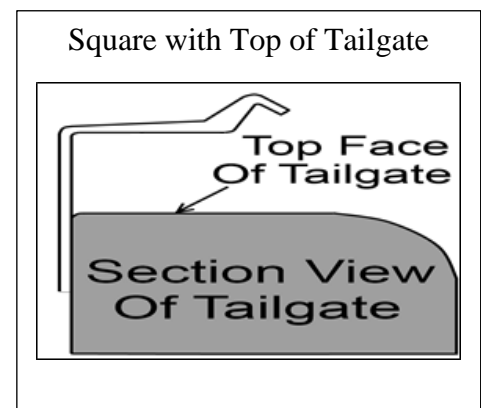

### 5. Fit The Support Bar

- (a) Insert solid bar pieces into either end of hollow tube. Place the bar into the Bar Brackets and centre the hollow tube.
- (b) Adjust the hollow tube so the holes are facing to the

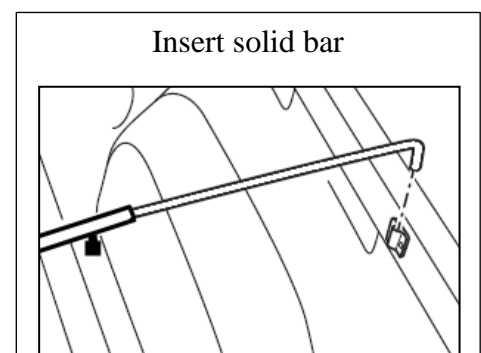


ground (this prevents the grub screws rubbing against the tonneau).

- (c) Tighten the grub screws to secure the hollow tube into place.

## 6. Attach The Cover

- (a) To attach the cover, slide the Rope Front into the Rope Track channel and drape the cover across the tub.
- (b) Clip the side plastics under the aluminium profile first using the pull loops in the corners to stretch the cover.
- (c) Clip the plastic on the tailgate under the aluminium profile last.



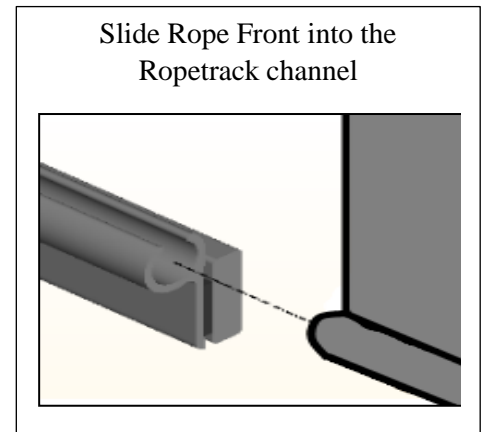


**You can adjust your tonneau, to make it tighter or looser, by simply raising or lowering the height of your tonneau support bar.**

## How to Fit Internal Elastic Shock Cord

To be used for covering larger loads

- Tie a knot in one end of the shock cord.
- Pull shock cord through all plastic hooks.
- Feed the shock cord through loops on the cover.
- Tie a knot at the other end.
- Space the hooks as required.
- Use washers to tie off rope.

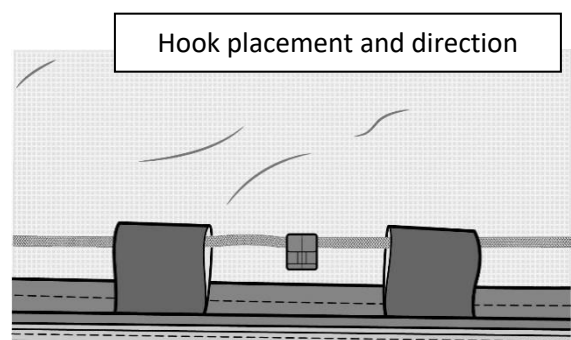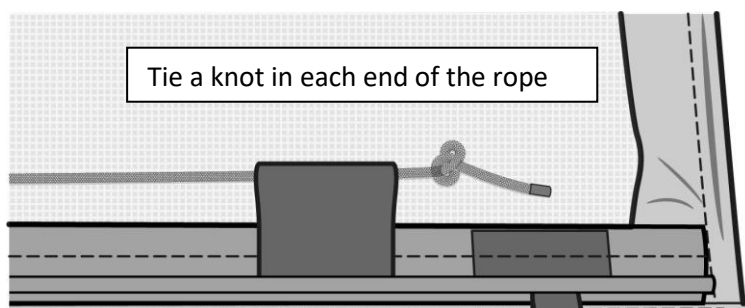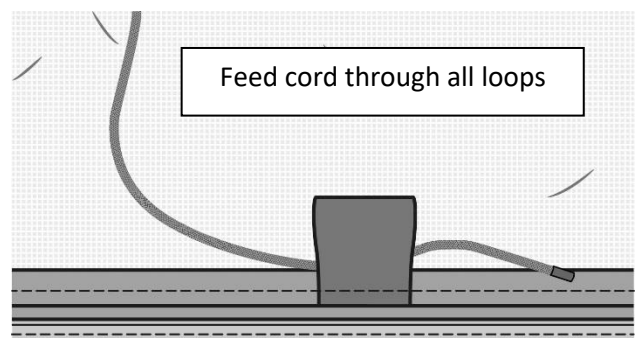

## Tonneau Cover Tethering System



- **Rivet the extra Metal Bracket to the Front Driver Side Rail.**
- **Untie the end of the rope of the Cover and loop it through the Metal Bracket.**
- **Rethread the Washer and tie the end of the rope into a knot.**