

Tonneau Cover Fitting Instructions

Volkswagen Amarok

Dual Cab with Factory Ultimate Canyon Sports Bars

2011 - Current

Part number: ATC01314

Package includes

1 x Tonneau Cover	26 x 4 mm Rivet
1 x Rope Track (1610mm Long)	2 x Bar Bracket
1 x Tailgate Rail (1395mm)	5 X Rope Hooks
2 x Side Rail (1160mm)	2 x Washers
1 x Support Bar	1 x Fitting Instructions

TONNEAU COVER INSTALLATION PROCEDURE

1. ROPETRACK

(a) Rest the aluminium rope track on the top of the front edge of the Tub, with the 'C' channel facing the cabin. Centralise the rope track.

(b) To get the correct space between the sports bar and rope track place one bar bracket at each end of the rope track, between the sports bar and the back edge of the open section of the rope track. **(See figure 1)**

Place One Bracket On Each Side



Figure 1

(c) Using a 4mm drill bit, drill 5 holes evenly spaced through the aluminium rope track into the tub. The first hole at each end should be 100mm from the edge of the aluminium rope track. **(See Figure 2)**

Drill the Ropetrack



Figure 2

(d) Place a 4mm rivet in each hole as it is drilled, but do not rivet. Once all holes have been drilled, remove the rivets, ropetrack and clean any swarf.

(e) Apply rust inhibitor to the drilled holes in the tub and apply a bead of silicon to the ropetrack along the line of the holes. **(See Figure 3)**

Apply Bead of Silicone

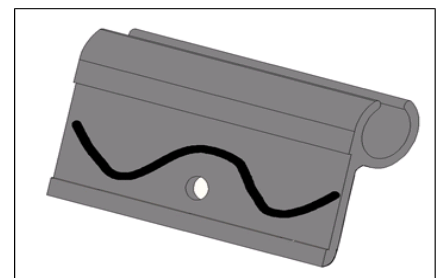



Figure 3

(f) Place the ropetrack back into position and then rivet ropetrack into place.

2. ATTACH THE SIDE ALUMINIUM RAIL(1160MM)

(a) From the front edge of the rail (30mm from the bottom edge) measure and mark the following locations:

- 50mm, 302.5mm, 538mm, 570mm, 807mm and 1060mm




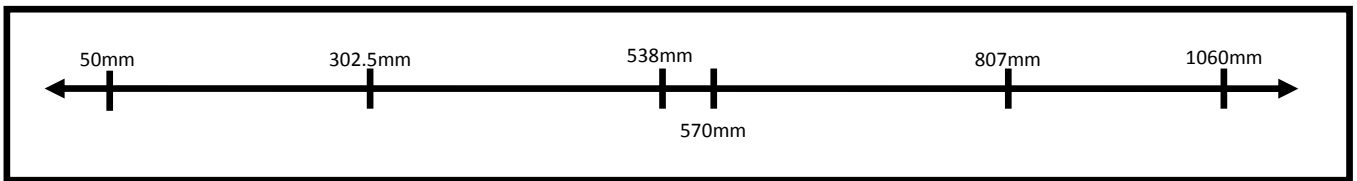


- (b) Centralise between the sport bar.
- (c) Align the inside of the rail with inside the driver's side edge of the tub, pushing the side rail up against the ropetrack (already Fitted).
- (d) Keep the rail square and flush with the inside of the tub.
- (e) Drill each marked locations through aluminium and into the inside edge of the tub with 4mm drill bit.
 - **Importance note:** keep all rails flush with the top walls and tailgate while drilling.
- (f) Then rivet into the places except middle two (leave for brackets).
- (g) Attach Bar bracket by placing 4mm rivet through each holes of bracket and rivet into the middle two holes.


❖ Repeat those instructions for the other side.

3. ATTACH TAILGATE ALUMINIUM RAIL (1345MM)

- (a) Centre the rail and align the inside edge of the rail with the inside edge of the tailgate, sitting it flush on top of the tailgate.

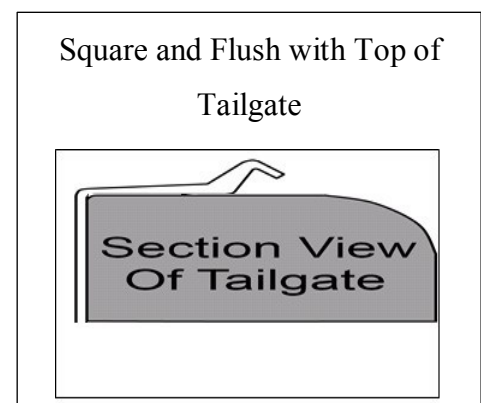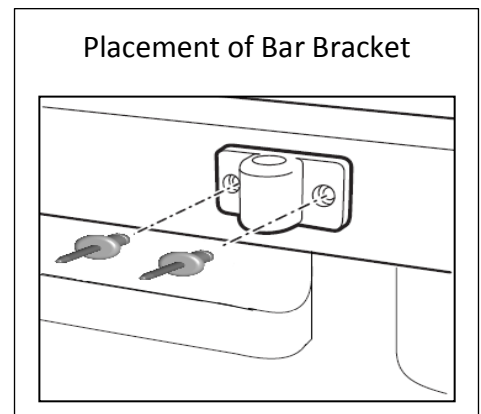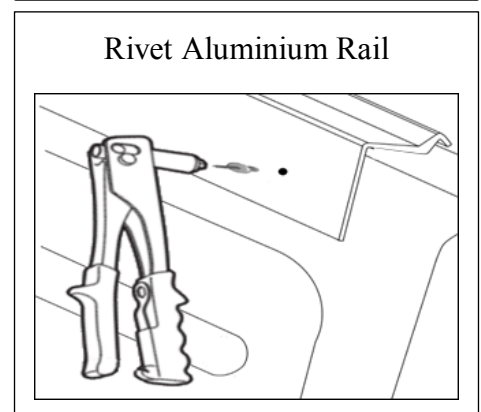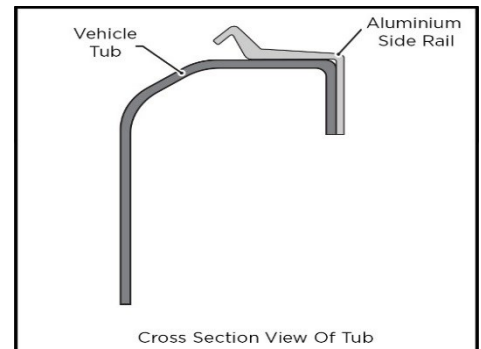

- (b) Measure and mark the centre, and 310mm and 620mm from the centre of the rail, 30mm from the bottom edge.

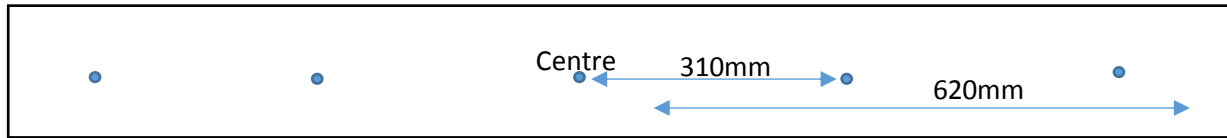


- (c) Drill through each of the marks of the aluminium rail into the tailgate. Rivet the tailgate rail to the tailgate to complete the attachment.

4. FIT THE ADJUSTABLE SUPPORT BAR



- (a) Insert solid bar pieces into either end of hollow tube. Place the bar into the Bar Brackets and centre the hollow tube.
- (b) Adjust the hollow tube so the holes are facing to the ground (this prevents the grub screws rubbing against the tonneau). Tighten the grub screws to secure the hollow tube into place.

Note: ***Do not over tighten screws as you may damage the threads.***

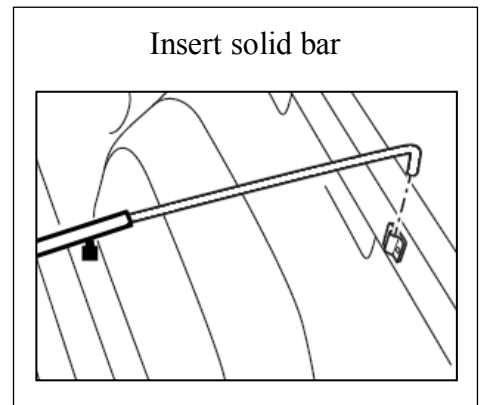

5. FIT THE TONNEAU COVER




- (a) Slide the front rope of the tonneau cover into the ropetrack and centre the cover then drape the cover over the head board.
- (b) Clip the driver's side of the cover onto the driver's side rail then attach the passenger side of the cover using the plastic's edge in the corners to help stretch the cover.
- (c) Clip the plastic onto the tailgate rail using the plastic's edge in the corners to help stretch the cover.
- (d) To remove cover once fitted peel cover away from Aluminium clip in rail by peeling away from the edge of the plastic.
- (e) **IMPORTANT:** Do not use cover corners to lift. Always use plastic edges.

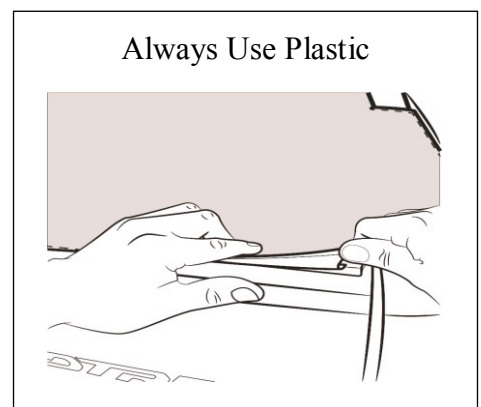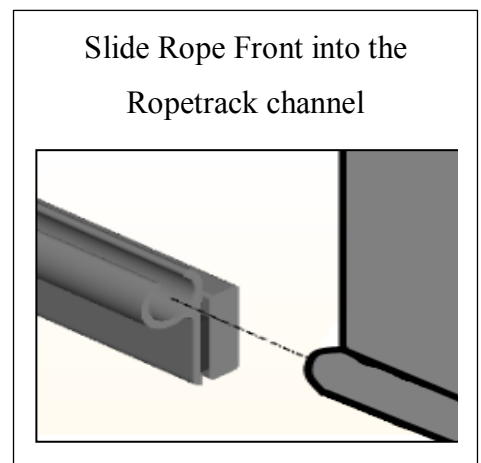

How to Fit Internal Elastic Shock Cord

To be used for covering larger loads

- Tie a knot in one end of the shock cord.
- Pull shock cord through all plastic hooks.
- Feed the shock cord through loops on the cover.
- Tie a knot at the other end.
- Space the hooks as required.
- Use washers to tie off rope.

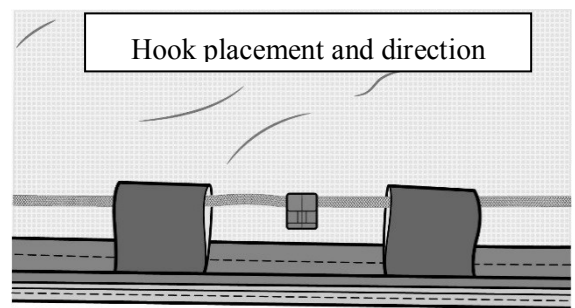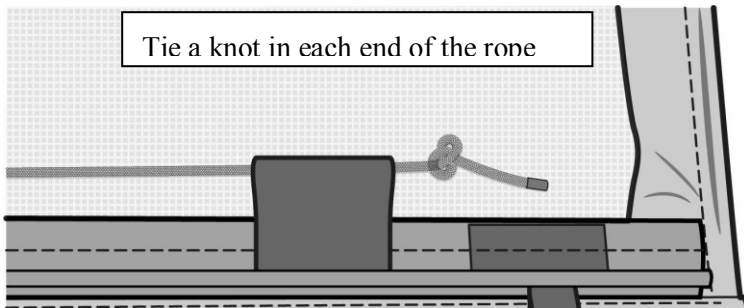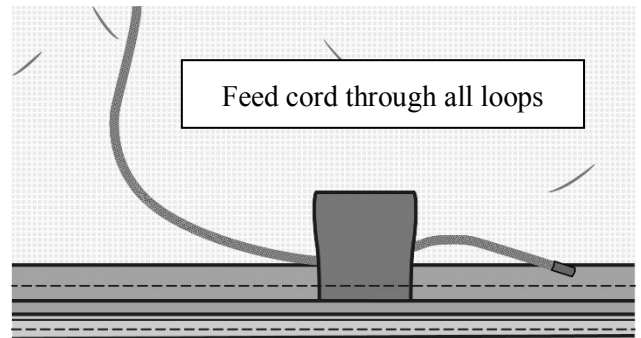

Register now to activate your 3 year warranty by filling out our online form!

WARRANTY AND FEEDBACK

Turn your 1 year warranty into a 3 year warranty by filling in our online warranty form!

QR Code:



Website Link: <http://www.aussietonneaus.com.au/en-au/warranty-card-request-form.html>

Thank you for purchasing a Aussie Tonneau Product.

How To Easily Attach & Detach Your Clip On Cover



No more ugly pull tabs, tearing covers, or needing Arnold-like strength with this method!

- Visit the following link: <http://bit.ly/AT-CLIP>
- Or simply scan the QR code. Open your camera app and point it here to see the video! → → →

